

Panattoni Park Olomouc



Panattoni Park Olomouc



OLOMOUC-HEJČÍN



BUILDING A

AVAILABLE
25,800 sq m

SHOPPING CENTRE



AIRPORT OLOMOUC



D35

A

PARK ENTRANCE

PARK ENTRANCE

OSTRAVA (99 km, 60 min)

KATOWICE (187 km, 108 min)

BRNO (73 km, 58 min)

VIENNA (185 km, 155 min)

PRAHA (168 km, 175 min)

Supporting structure

- Pad or pilot foundations, insulated plinth panels up to 300 mm above floor
- Prefabricated concrete columns in 12 × 24 m grid or per layout
- Prefabricated concrete or steel roof beams, clear height of 10 m

Floor

- Fibre reinforced concrete floor, PE membrane, cut joints, 180 mm thick, surface treated with hardener
- Load capacity of 50 kN/sq m, 60 kN point load
- Flatness according to DIN 1822, table 3, line 3

Roof

- Corrugated steel sheets, mineral wool insulation, PVC membrane
- Free load capacity of 15 kg/sq m for clients installations
- Min. 2% of skylights in warehouse area
- Siphonic drainage system, emergency overflows

Facade

- Horizontal sandwich panels with mineral wool insulation
- Prefabricated concrete facade around docks to approx. 4.5 m height
- Double glazed windows in offices

Docks

- 1x electrically operated 3.0 × 3.0 m dock for each 1,000 sq m of hall
- Each dock equipped with hydraulic leveller, 60 kN capacity, PE shelter, wheel guides
- 1x electrically operated 4.0 × 4.5 m drive-in gate for each 5,000 sq m of hall



Hall installations

- Gas Sahara heaters or infrared gas radiators, heating according to norms for warehousing
- ESFR sprinklers under roof, FM Global certified tank and pumps
- 200 lux LED lighting (excluding influence of clients installations)
- 1x 630 kVA dry transformer station per each 25,000 sq m of hall

Production upgrade (optional)

- Increased facade and roof insulation
- Heating and ventilation in accordance with code for manufacturing (assembly)
- 300 lux LED lighting (excluding influence of clients installations)
- Increased percentage of skylights area


Offices

- 2 level custom designed in-built, incl. offices, socials, locker rooms, day room, excl. furniture and appliance
- Aluminium entrance door with canopy to entrance lobby
- Tiles, carpets or PVC floor surfaces, suspended mineral ceiling panels
- Social rooms with ceramic fixtures, wall tiles, and basic accessories
- PVC cable trays below windows, 2x 220 V socket each 8 sq m
- Server room with 2 split units and antistatic PVC floor
- Top cooling

Outside areas

- Hard areas from concrete pavers, sloped for drainage
- 2 m high mesh fence, entrance barriers and manual gate
- Green areas with grass, bushes, and trees

Panattoni Park Olomouc

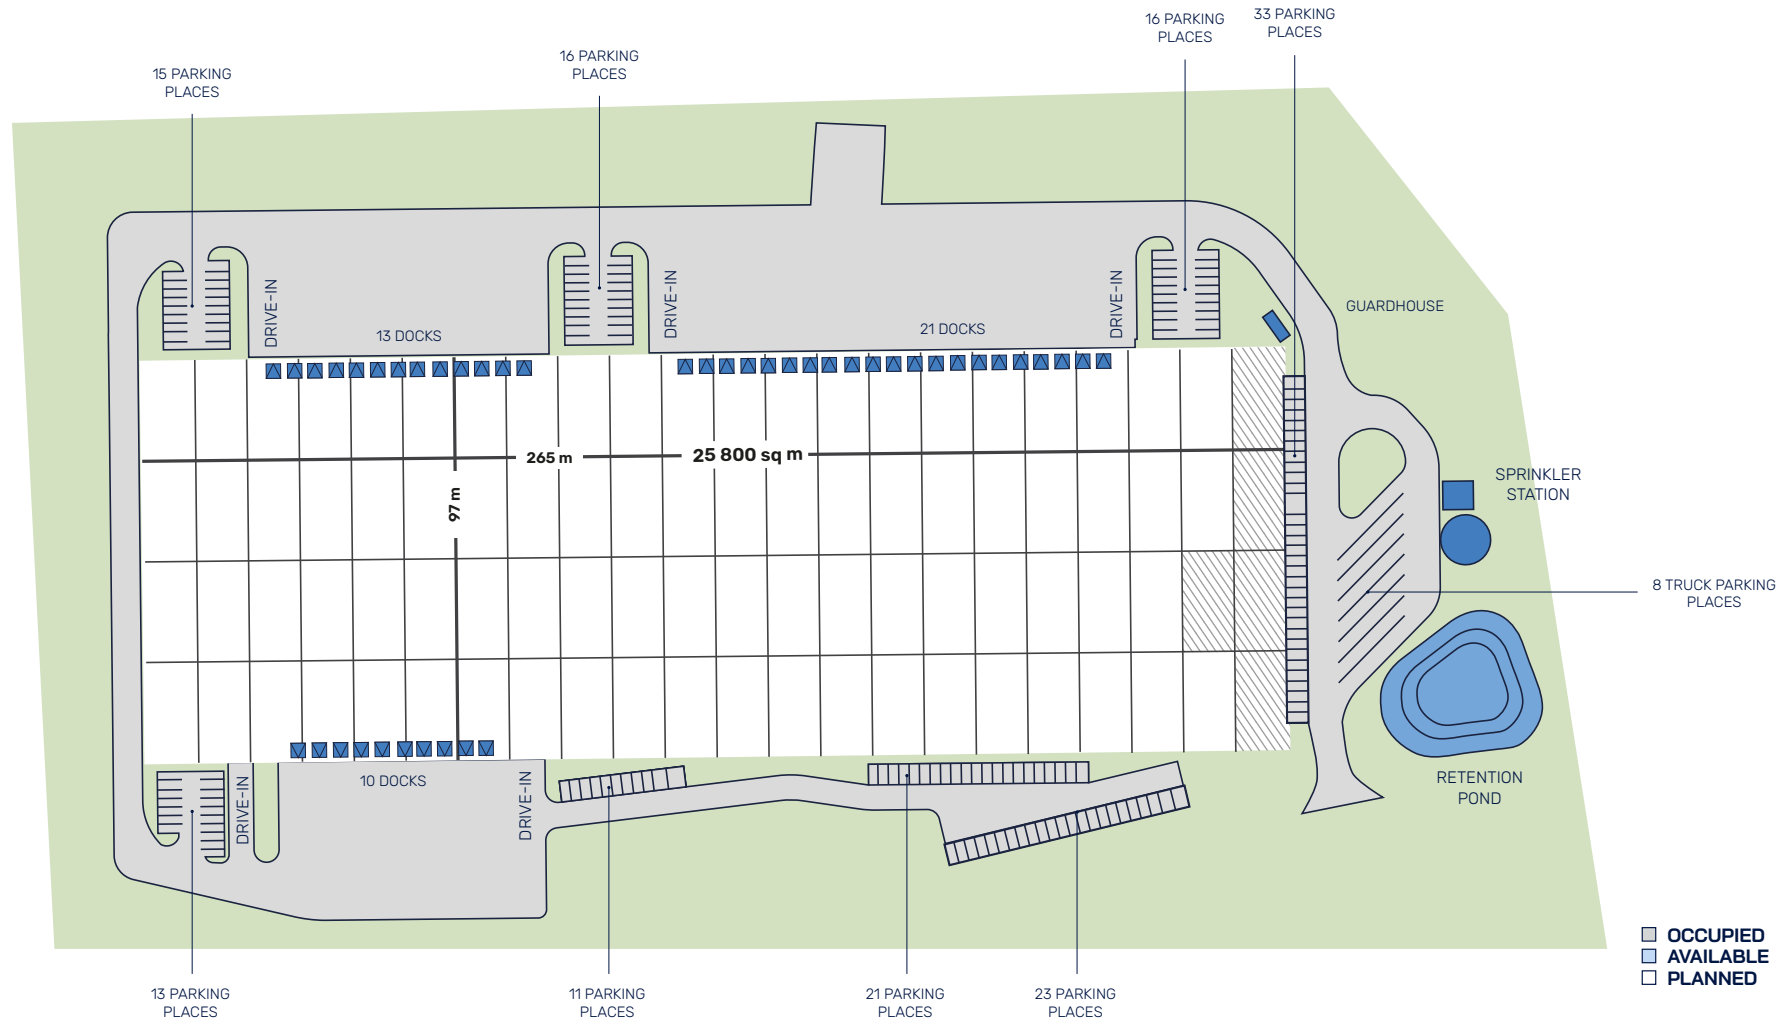

TOTAL BUILT-UP AREA 25,800 sq m
BUILDING 25,800 sq m

WAREHOUSE
 Column grid
 Clear height
 Floor loading
 ESFR sprinkler system
 LED lighting

12 m × 24 m
 Up to 9 m
 5 t/sq m

SUSTAINABILITY TRENDS
 BREEAM New Construction level Excellent
 Option for heat pumps and photovoltaics

OUR REFERENCES

Panattoni Park Cheb



Location: Cheb, Karlovy Vary Region

Industry: Distribution centre

Size: 103,000 sq m

Year of completion: 2021

Panattoni Park Chomutov North



Location: Jirkov, Ústí Region

Industry: Production

Size: 37,000 sq m

Year of completion: 2023

Panattoni Park Kojetín



Location: Kojetín, Olomouc Region

Industry: E-commerce

Size: 187,000 sq m

Year of completion: 2022

Panattoni Park Stříbro



Location: Ostrov u Stříbra, Pilsen Region

Industry: Production

Size: 79,400 sq m

Year of completion: 2015–2019 (3 phases)



PANATTONI CZECH REPUBLIC DEVELOPMENT

ŠPORKOVSKÝ PALÁC | V CELNICI 1034/6

110 00 PRAHA 1 | ČESKÁ REPUBLIKA

WWW.PANATTONIEUROPE.COM

COMMERCIALCZ@PANATTONI.COM