


# Panattoni Park Klatovy – Pod Borem





# CLOSE TO THE D5 MOTORWAY PERFECT CONNECTION TO GERMANY

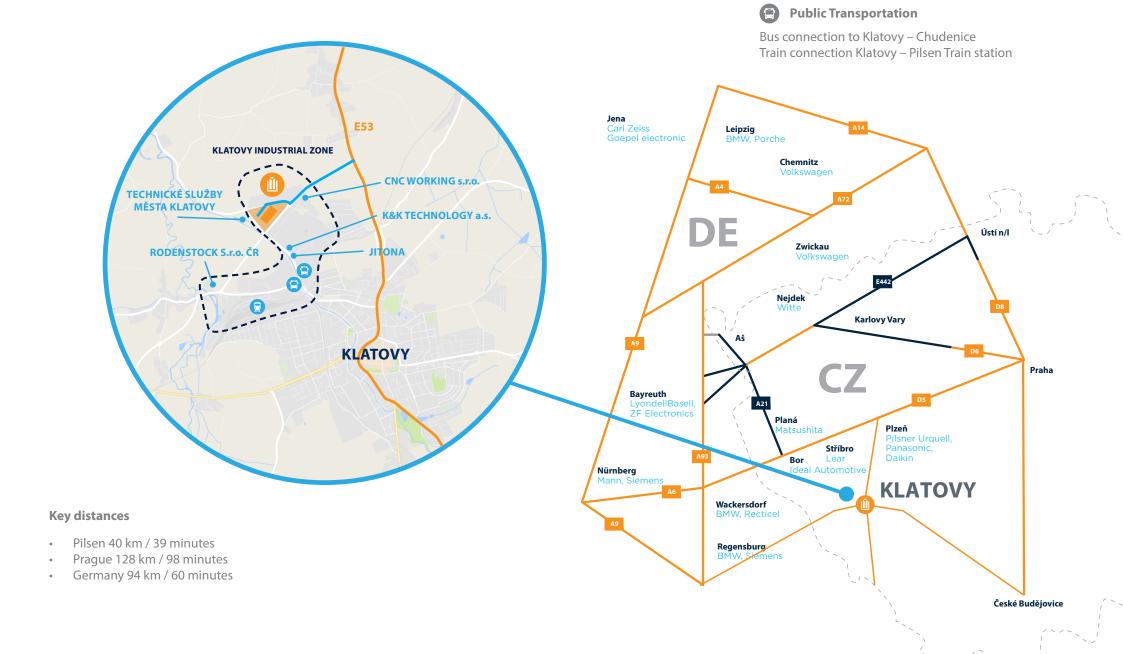

### STANDARD TECHNICAL SPECIFICATION

### SUPPORTING STRUCTURE

- Pad or pilot foundations, insulated plinth panels up to 30cm above floor
- Prefabricated concrete columns in 12 x 24 m grid or per layout
- Prefabricated concrete or steel roof beams, clear height of 10m

### **FLOOR**

- Fibre reinforced concrete floor, PE membrane, cut joints, 18cm thick, surface treated with hardener
- Load capacity of 50 kN/sqm, 60 kN point load
- Flatness according to DIN 1822, table 3, line 3

#### ROOF

- Corrugated steel sheets, mineral wool insulation, PVC membrane
- Free load capacity of 15 kg/sqm for clients installations
- Min. 2% of skylights in warehouse area
- Syphonic drainage system, emergency overflows

### FAÇADE

- Horizontal sandwich panels with mineral wool insulation
- Prefabricated concrete façade around docks to approx. 4.5m height
- Double glazed windows in offices with insulated PVC profiles

#### DOCKS

- 1x electrically operated 3 x 3.2 m dock for each 1 000 sqm of hall
- Each dock equipped with hydraulic leveller, 60 kN capacity, PE shelter, wheel guides
- 1x electrically operated 3.5 x 4.2 m drive-in gate for each 5 000 sqm of hall



- Gas Sahara heaters or infrared gas radiators, heatin according to norms for warehousing
- ESFR sprinklers under roof, FM Global certified tank and pumps
- 200 lux LED lighting (excluding influence of clients installations)
- 1x 630 kVA dry transformer station per each 25 000 sgm of hall
- Heating and ventilation in accordance with code for manufacturing (assembly)
- 300 lux LED lighting (excluding influence of clients installations)
- · Increased percentage of skylights area
- 2 level custom designed in-built, incl. offices, socials, locker rooms, day room, excl. furniture and appliance
- Aluminium entrance door with canopy to entrance lobby
- Tiles, carpets or PVC floor surfaces, suspended mineral ceiling panels
- Social rooms with ceramic fixtures, wall tiles, and basic accessories
- PVC cable trays below windows, 2x 220V socket per work place
- Server room with 2 split units and antistatic PVC floor
- Top cooling

- Hard areas from concrete pavers, sloped for drainage
- 2m high mesh fence, entrance barriers and manual gate
- · Green areas with grass, brushes, and trees

## **Development concept**

### TOTAL BUILD-UP AREA 14 089 m<sup>2</sup>

BUILDING A 14 089 m<sup>2</sup>

### **WAREHOUSE**

Column grid 12 m x 24 m

Clear height 10 m – higher building possible

ESFR sprinkler system

Light intensity in the hall 200 lux Skylights min 2% Floor loading 5t/sqm

### **OFFICE PREMISES**


Clear height 2,7 m Light intensity 500 lux

Built to suit solutiont

### **SUSTAINABILITY TRENDS**

LED lighting BREEAM Very Good certified

- Designed and constructed to the highest A class standard
- Suitable for logistics and production activities
- Turnkey solution according to the client's requirements
- Accessibility 24/7

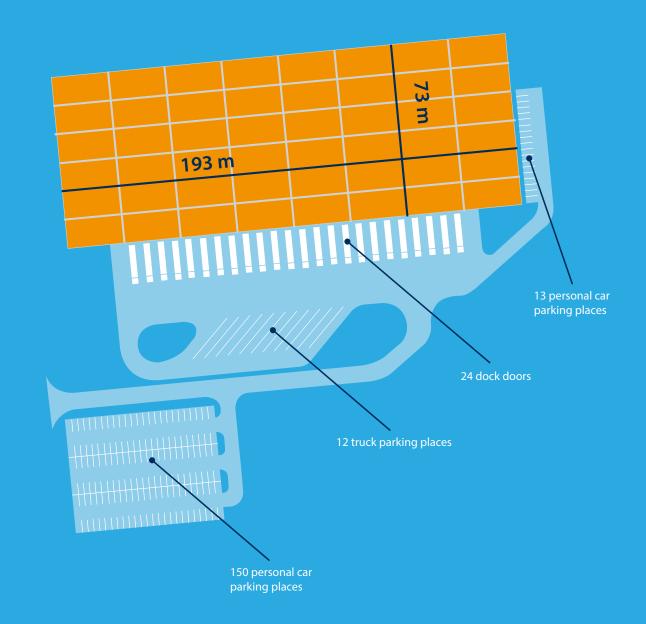





### Panattoni Worldwide International vision. Local focus

With an expansive international platform, Panattoni Development Company, Inc. specializes in industrial, office and build-to-suit development. Our 31 offices in the United States, Canada and Europe are responsible for the development of approximately 30 million square meters. Each office is rooted in the local community with strong partnerships that produce the best results for our clients in each region. You can find us in Poland, Great Britain, the Czech Republic, Slovakia, Germany and Luxembourg.

### CZECH REPUBLIC Panattoni

Šporkovský palác, V Celnici 1034/6 110 00 Prague 1 Czech Republic

czinfo@panattoni.com www.panattoni.cz www.panattonieurope.com/cz

#### SLOVAKIA Panattoni

Eurovea Central 3, Pribinova 10 811 09 Bratislava Slovakia

skinfo@panattoni.com www.panattoni.com www.panattonieurope.com/sk